



ATOMIZING NOZZLE

Model ANB-4

Model ANB-8



ANB-4



ANB-8

303 Stainless Steel Construction

Available in 1/4 inch (ANB-4) and 1/2 inch (ANB-8 MNPT)

60 Degree (approximate) spray pattern

Can be used for line check or as backup for line check

Accelerates mixing of liquids or Promotes atomization of liquid into gas

**NOTE: Nozzles are heat treated and may have darker appearance than on brochure*

Sidewinder Pumps, Inc. Lafayette, Louisiana, USA

Office (337) 235-9838 / Fax (337) 235-9852


www.sidewinderpumps.com sales@sidewinderpumps.com



1/4 Inch FNPT

1/4 or 1/2 Inch MNPT

- Heat treated
- 303 SS construction

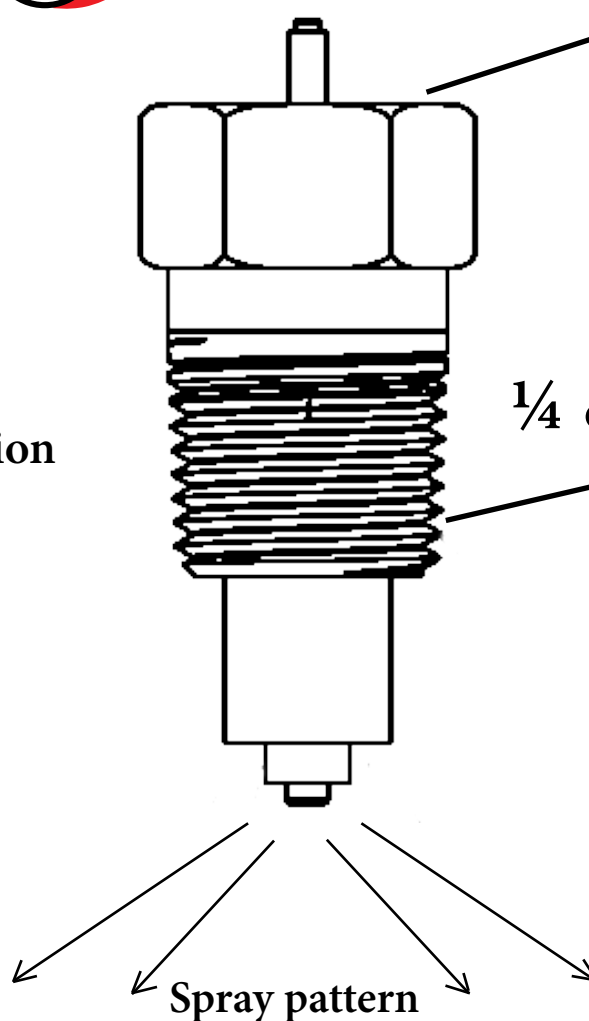

Maximum operating pressure 6,000 PSI

Works more effectively at higher flow rates

For calculating injection pressures add 800 PSI to line pressure

For best results:

- connect nozzle as close to main flow stream as possible
- use of pump pulsation dampener will increase effectiveness
- spray cone should spray into main flow stream uninterrupted